

## MediaMesh®

Flexible, one direction

Material	AISI Type 316 Stainless
Open Area	variable
Weight	variable
Nominal Thickness	0.875"
Cable	0.075"
Opening	variable depending on LED tube spacing
Rod	0.115"
Center-to-center cable	85 mm, adjusted to horizontal pixel pitch
Max. width	13'
Vertical LED Pitch	40mm, 50mm or 60mm
Horizontal LED Pitch	42.5mm
NITS	4200 - 9700
Viewing Distance	100' - 130' typical

Mediamesh is customized to each specific project. Values shown here are based on standard combinations of pixel pitches.

Mediamesh is protected under patent 7,513,644 B2. Other patents may apply.

GKD-USA, Inc. T 800 453 8616  
 825 Chesapeake Drive T 410 221 0542  
 Cambridge MD 21613 F 410 221 0544  
 www.gkdmalfabrics.com sales@gkdusa.com  
 www.gkdmediamesh.com





### Solutions

Facades  
 Graphic  
 Mediamesh®

### Attachments

Woven-in bar with eyebolt

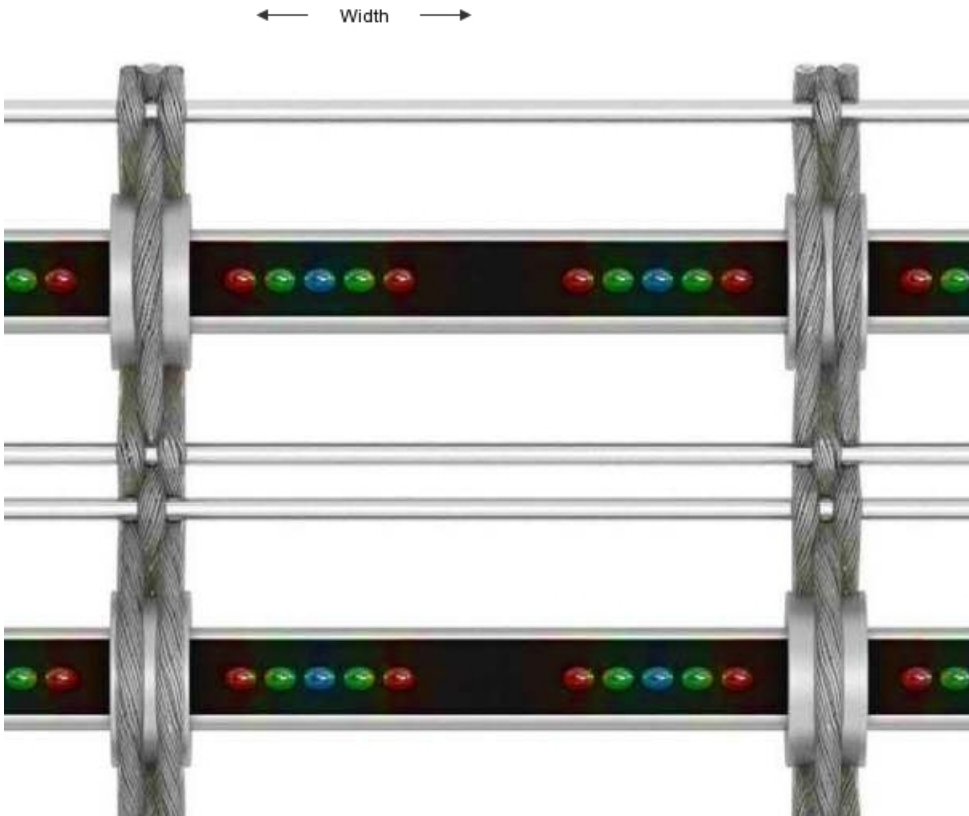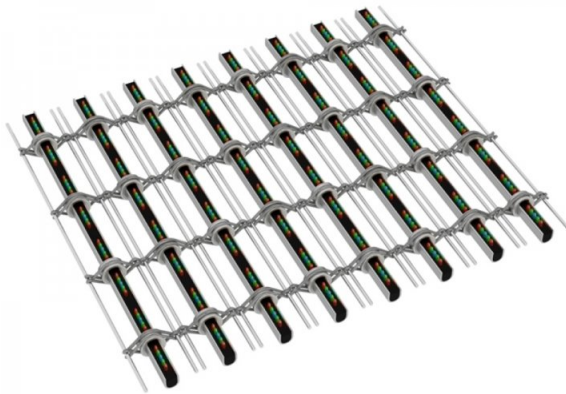

Inches 0 .5 1

## MediaMesh® v4

Flexible, one direction

Material	AISI Type 316 Stainless
Open Area	55%
Weight	1.95 lbs/sqft
Nominal Thickness	0.875"
Cable	0.075" x 3
Rod	0.115"
Center-to-center cable	85 mm
Max. width	13'
Max. length	Contact GKD
Vertical LED Pitch	40 mm
Horizontal LED Pitch	42.5 mm
NITS	6300 - 9700
Viewing Distance	~105'

Mediamesh is customized to specific project requirements. Values shown here are based on a standard configuration of pixel pitches. Shown in 1/2 scale.

Mediamesh is protected under patent 7,513,644 B2. Other patents may apply.

GKD-USA, Inc.  
825 Chesapeake Drive  
Cambridge MD 21613  
www.gkdmetailfabrics.com  
www.gkdmediamesh.com

T 800 453 8616  
T 410 221 0542  
F 410 221 0544  
sales@gkdusa.com




### Solutions

Facades  
Graphic  
Mediamesh®

### Attachments

Woven-in bar with eyebolt

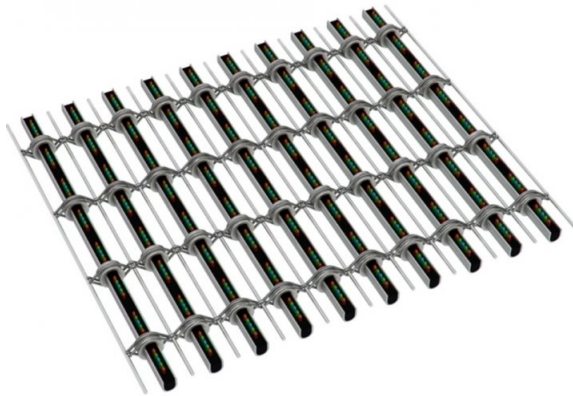

## MediaMesh® v5

Flexible, one direction

Material	AISI Type 316 Stainless
Open Area	57%
Weight	1.83 lbs/sqft
Nominal Thickness	0.875"
Cable	0.075" x 3
Rod	0.115"
Center-to-center cable	85 mm
Max. width	13'
Max. length	Consult GKD
Vertical LED Pitch	50 mm
Horizontal LED Pitch	42.5 mm
NITS	5100 - 7800
Viewing Distance	~115'

Mediamesh is customized to specific project requirements. Values shown here are based on a standard configuration of pixel pitches. Shown in 1/2 scale.

Mediamesh is protected under patent 7,513,644 B2. Other patents may apply.

GKD-USA, Inc.  
825 Chesapeake Drive  
Cambridge MD 21613  
www.gkdmalfabrics.com  
www.gkdmediamesh.com

T 800 453 8616  
T 410 221 0542  
F 410 221 0544  
sales@gkdusa.com




### Solutions


Facades  
Graphic  
Mediamesh®

### Attachments

Woven-in bar with eyebolt

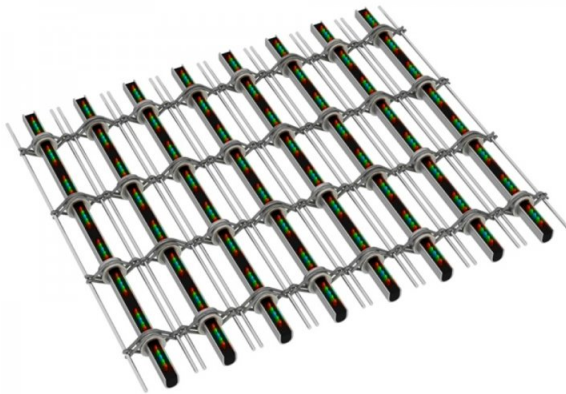

← Width →

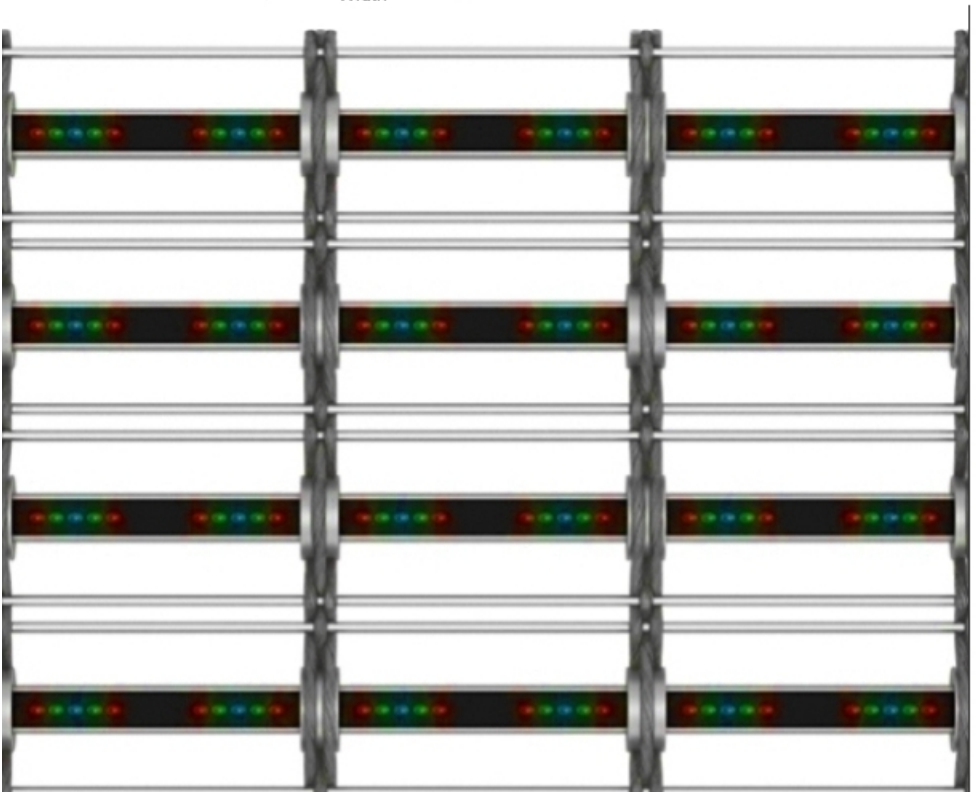

## MediaMesh® v6

Flexible, one direction

Material	AISI Type 316 Stainless
Open Area	58%
Weight	1.74 lbs/sqft
Nominal Thickness	0.875"
Cable	0.075" x 3
Rod	0.115"
Center-to-center cable	85 mm
Max. width	13'
Max. length	Consult GKD
Vertical LED Pitch	60 mm
Horizontal LED Pitch	42.5 mm
NITS	4200 - 6450
Viewing Distance	~130'

Mediamesh is customized to specific project requirements. Values shown here are based on a standard configuration of pixel pitches. Shown in 1/2 scale.

Mediamesh is protected under patent 7,513,644 B2. Other patents may apply.

GKD-USA, Inc.  
825 Chesapeake Drive  
Cambridge MD 21613  
www.gkdmetailfabrics.com  
www.gkdmediamesh.com

T 800 453 8616  
T 410 221 0542  
F 410 221 0544  
sales@gkdusa.com




### Solutions

Facades  
Graphic  
Mediamesh®

### Attachments

Woven-in bar with eyebolt

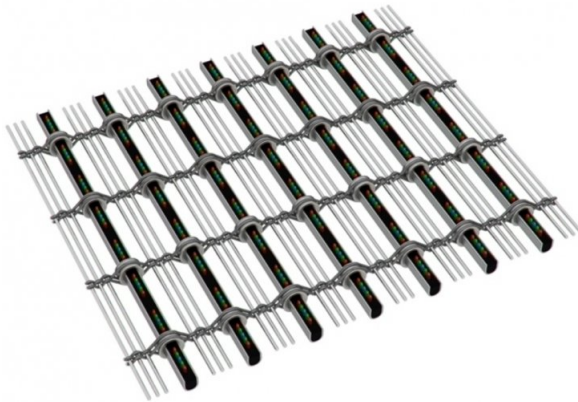

← Width →

